

# DuoFern switch actuators


## Universal actuator

### Overview of advantages

- Users / units are capable of radio transmission:  
Independent switching of two random users  
up to 500 w
- Operation by DuoFern transmitter
- Switches or sensors can be connected  
for manual operation
- Installation in a conventional flush-mounted box  
(deep box is recommended)

#### Additional functions in conjunction with the DuoFern manual central operating unit:

- "Astro" function for morning and evening:  
Control of units in line with the dawn and  
twilight according to location and postcode
- Standard / Week / Day programme and  
random function:  
Individual control of users including presence  
simulation by random function
- Unit / light mode switchover

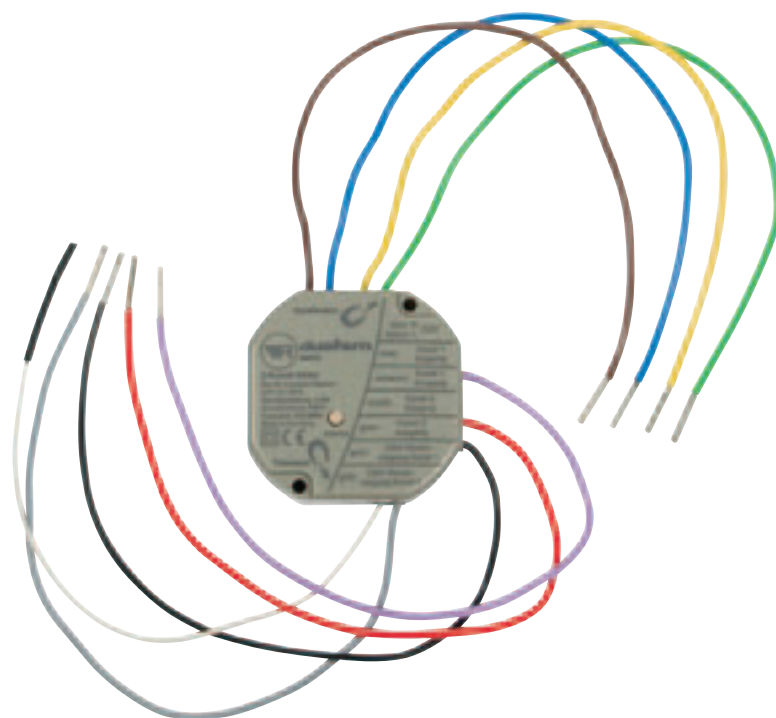

9470



#### Technical specifications

Item number	9470
Dimensions	Ø = 48 mm, H = 20 mm
Supply voltage	230 V / 50 Hz
Standby consumption	≤ 0.5 w
Switching capacity	max. 500 w (per channel)
Protection class	II (only for use in dry areas)
Frequency	434.5 MHz
Transmission power	max. 10 mW
To fit the following DuoFern transmitters	9493, 9491, 980x
Complies with the European Low Voltage Directive and EMC Directive	