


FernoTron Receiver

Receiver with sensor touch function

Overview of advantages

- HF receiver for tubular motors:
Receives, stores and executes switching times set by the FernoTron central operating units
- Execution of automated solar functions by means of the radio solar sensor
- Execution of the "Astro" function
- Patent protection
- Install in conventional flush-mounted back box (deep box is recommended)
- Manual operation on site by touching the blank cover or by pressing the rocker switch of the respective switch programme
- Wind function can be assigned to external input

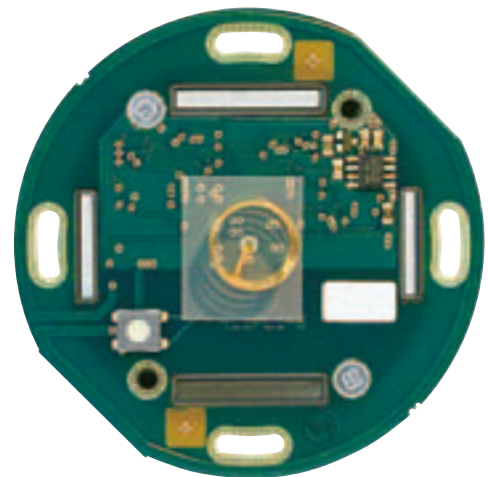

2423



Technical specifications

Item number	2423
Dimensions (LxW)	57 x 57 mm
Supply voltage	230 V / 50 Hz
Switching current	8 (4) A
Protection class	II
Receiving frequency	433.92 MHz
Standby consumption	2 w
Power reserve	approx. 2 hrs
Switchover time	> 0.6 sec
Fits the following tubular motors	RolloTube Basic, RolloTube Standard, RolloTube Comfort
Complies with the European Low Voltage Directive and EMC Directive	