


FernoTron Transmitter

Easy-Comfort manual radio transmitter

Overview of advantages

- Simple execution of small automated functions in the home:
Programming of up to 7 FernoTron receivers in 1 group
- Radio end point setting and change of direction with RolloTube tubular motors:
Adjustment / modification is possible at any time
- Extensively programmable automatic functions:
Day / week programme and random controller can all be programmed separately
- Summer / Winter changeover at the press of a button
- Sunlight / Darkness automation with S/D sensor available

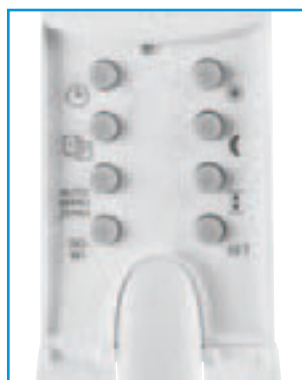

Operating panel behind the cover panel is shown



2406



Technical specifications	
Item number	2406
Dimensions (LxWxH)	37 x 160 x 16 mm
Supply voltage	3 V
Battery type	CR 2450
Battery life	approx. 3 years
Transmission frequency	433.92 MHz
Transmission power	max. 10 mW
Range	approx. 10 m
Sensitivity to sunlight	2,000 - 20,000 Lux
Sensitivity to darkness	2 - 50 Lux
Random generator	(+) 0 - 30 min
To fit the following tubular motors*	RolloTube Basic, RolloTube Standard, RolloTube Control, RolloTube Comfort Radio
Complies with the European Low Voltage Directive and EMC Directive	

*Use with RTB, RTS and RTC only possible in conjunction with a FernoTron receiver.