



RolloTube Basic

Small Ø 35 mm

Mechanical tubular motors

Overview of advantages

- Quick to fit and put into operation:
Fits every RADEMACHER click drive bearing
- Versatile applications:
Can be fitted into almost all roller shutter boxes combined with the wide range of click drive bearings
- Rubber connecting cable:
Temperature- and UV-resistant connecting cable for safe installation, both inside and outside (IP 44)
- Simple mechanical end-stop adjustment
- Corrosion-free, zinc-coated precision tube
- 5-year guarantee



shown without click adapter ring 4015K-S 4015K-S is shown



Equipment features								
Item number	Item name	Torque (Nm)	Speed (rpm)	Shaft type	Accessories, included			
					Adapter ring, mounted	Adapter ring / drive adapter, mounted	Bearing	Set, suspension clamps
RTBS 06/28Z	RolloTube Basic Small, tubular motor with mechanical limit switching, accessory set	6	28	40 mm AF	4015K-S	AM35M-SW40	4015K-04	3352
RTBS 06/28	RolloTube Basic Small, tubular motor with mechanical limit switching	6	28	from 40 mm AF	4015K-S			
RTBS 10/16Z	RolloTube Basic Small, tubular motor with mechanical limit switching, accessory set	10	16	40 mm AF	4015K-S	AM35M-SW40	4015K-04	3352
RTBS 10/16	RolloTube Basic Small, tubular motor with mechanical limit switching	10	16	from 40 mm AF	4015K-S			




Technical specifications

Item number	Torque (Nm)	Speed (rpm)	Voltage (V)/ Frequency (Hz)	Power (w)	Current consumption (A)	Protection class IP	On-period (min)	Cable length (m)	Overall length (mm)
RTBS 06/28Z	6	28	230 / 50	121	0.53	44	4	2.5	472
RTBS 06/28	6	28	230 / 50	121	0.53	44	4	2.5	472
RTBS 10/16Z	10	16	230 / 50	121	0.53	44	4	2.5	472
RTBS 10/16	10	16	230 / 50	121	0.53	44	4	2.5	472

Complies with the European Low Voltage Directive and EMC Directive and conforms to EN60335-1, EN60335-2-97 and EN14202

Dimensions

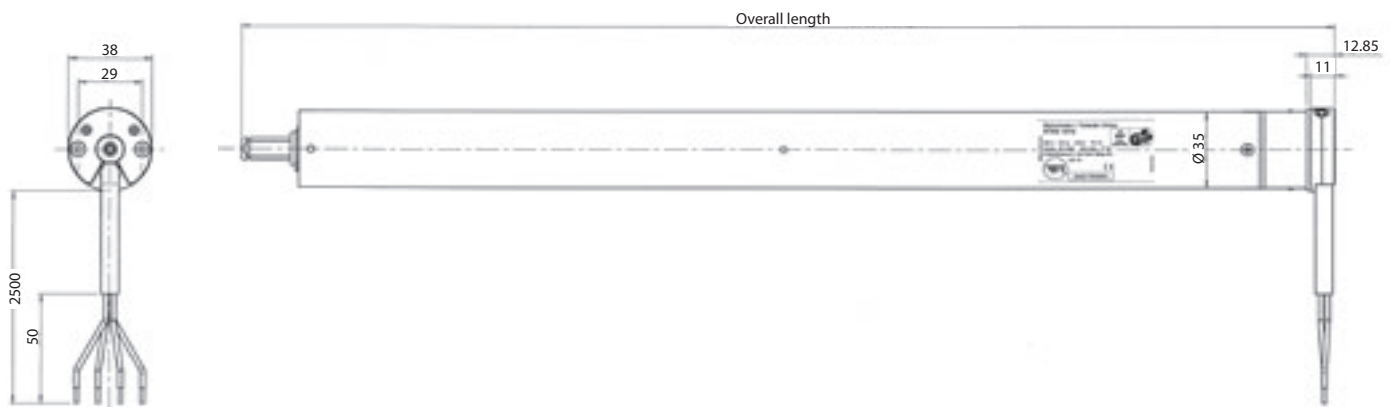

RolloHomeControl – controllers to fit RolloTube Basic Small



Troll

Time switches with maximum ease of operation and optimised fit.

Modi

The tubular motor controller for the belt box. Modi closes the belt-box opening and makes use of the available space.

ReWiSo

The convenient solution for the automatic and manual control of awnings and venetian blinds.

DuoFern

The intelligent bi-directional radio system for home automation.